
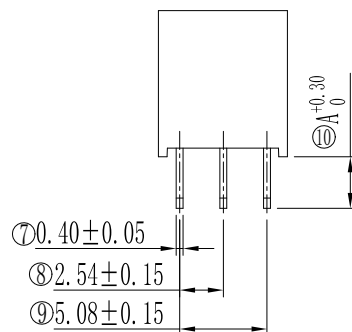
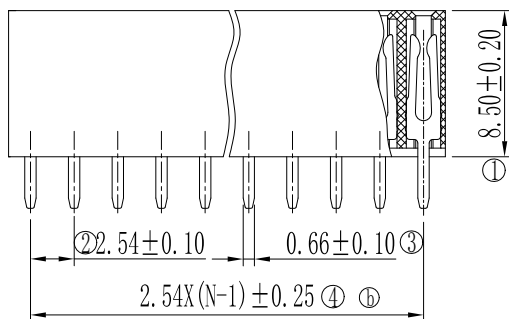


N=Terminal number per row

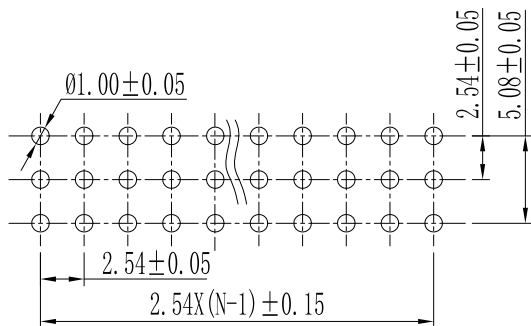

PCB LAYOUT

Unless otherwise specified tolerance:

X.	±0.50	X. °	±3°
.X	±0.38	.X°	±2°
.XX	±0.25		

Performance characteristics:

1.Main body part material

Insulator:See part number rule

Contact terminal: phosphor bronze,1.27μm Ni under plated,
outer plating see spec list

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤20 mΩ

Insulation resistance: ≥5000 MΩ

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Insertion force: ≤1.8 N/pin

Extraction force: ≥0.3 N/pin

4.Environment specification

Working temperature: -55℃~+125℃

Humidity: ≤93% at 40℃

⑤ Resistance to soldering heat: 260℃±5℃, 10s(Wave soldering)

5.Packing & storing

Method of packing: tray, outer box

Storing condition: temperature of -10℃~+40℃
below 80% relative humidity

6.Style of installation: solder pcb installation(THT)

7.To prevent the pollution of the environment product info

RoHS agreement:In line with the European Union RoHS.

1262 - XX X - 5 X - X									
Series No.	Terminal number per row 05 ~ 30 ⑤	Spec code		Spec code		Plating code		Insulator material & color	
		Code	Definition	Code	Definition	Code	Definition	Code	Definition
		1	3.00	5	Triple row spear form	1	Contacts	1	PBT BLACK UL94V-0
							Tail	X	Customized
						5	GOLD FLASH		
						6	Au 0.25 μm		
						7	Au 0.38 μm		
						8	Au 0.76 μm		

					2.54mm receptacle triple row straight socket	SL0.1262.108			
⑤	2	511631	James Zhang	2021.04.26		Projection	Rev.	Weight	Scale
④	2	SN-00003651	LinZhao	2014.05.21			A2		
Mark	NO.	File NO.	Signature	Date					
DRAW		Tim Lv 2013.04.24							
CHK	Tim 2021.05.18				1262-XXX-5X-X	All Dimensions in mm Sheet 1 of 1			
MAN						 SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			
STD	Juanli lai 2021.05.18								
APP	Alan 2021.05.19								