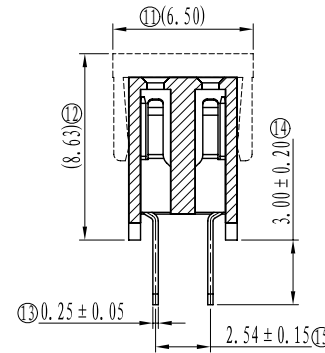
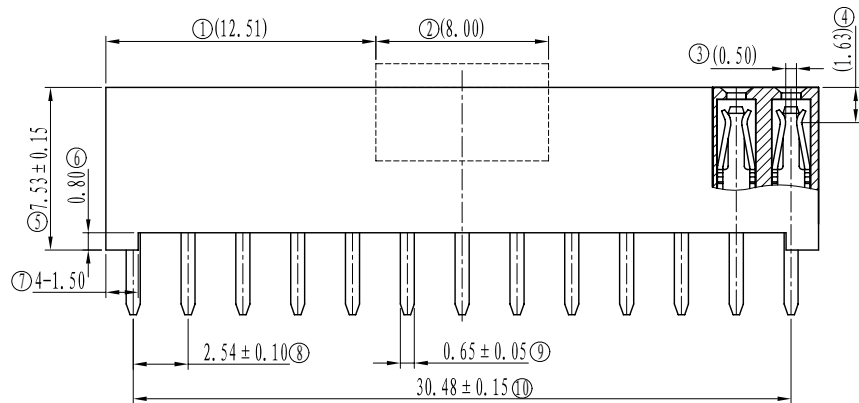


Recommended PCB LAYOUT
(PCB TOLERANCE ± 0.05)

Unless otherwise specified tolerance:

X.	± 0.50	X.°	$\pm 3^\circ$
.X	± 0.38	.X°	$\pm 2^\circ$
.XX	± 0.25		

Performance characteristics:

1.Main body part material

Insulator: LCP Black UL94V-0

Contact terminal: Phosphor bronze, 1.27 μ m Ni under plated,
Contact area plating Au 0.25 μ m, Tail plating matte Sn 3-5 μ m

2.Electrical requirements:

Current rating: 3 A

Contact resistance: ≤ 20 m Ω

Insulation resistance: ≥ 5000 M Ω

Withstanding voltage: 1000 Vr.m.s, 1mA, 60s

3.Mechanical requirements

Insertion force: ≤ 1.8 N/pin

Extraction force: ≥ 0.3 N/pin

Mechanical life: 100 cycles

4.Environment specification

Working temperature: -55 $^\circ$ C ~ +125 $^\circ$ C

Humidity: $\leq 93\%$ at 40 $^\circ$ C

Resistance to soldering heat: 260 $^\circ$ C, 30s

5.Packing & storing

Method of packing: Tape&reel, outer box

Storing condition: temperature of -10 $^\circ$ C ~ +40 $^\circ$ C

below 80% relative humidity

6.Style of installation: solder pcb installation

7.To prevent the pollution of the environment product info

RoHS agreement: in line with the european union RoHS.

Shinning P/N	HUAWEI P/N
1265-131-26-H	14200244

Series No.		Terminal number per row		Spec code		Spec code		Plating code		Insulator material & color	
		13		Code		Code		Code		Code	
				Tail Height		Definition		Definition		Definition	
				1		2		6		3	
				3.00		Double Row		Au 0.25 μ m		LCP BLACK UL94V-0	
								Sn		Packing with T&R	

					2.54mm receptacle double row straight socket 2X13Pin (Customer:HUAWEI)				SL0.1265.001			
Mark	NO.	File NO.	Signature	Date					Projection	Rev.	Weight	Scale
DRAW		Tim Lv 2013.10.22								A0		
CHK												
MAN												
STD												
APP												
					1265-131-26-H				All Dimensions in mm			
									Sheet 1 of 1			
									SHINNING SHENZHEN SHINNING ELECTRONIC CO.,LTD.			